



# CONNECTION DIAGRAM

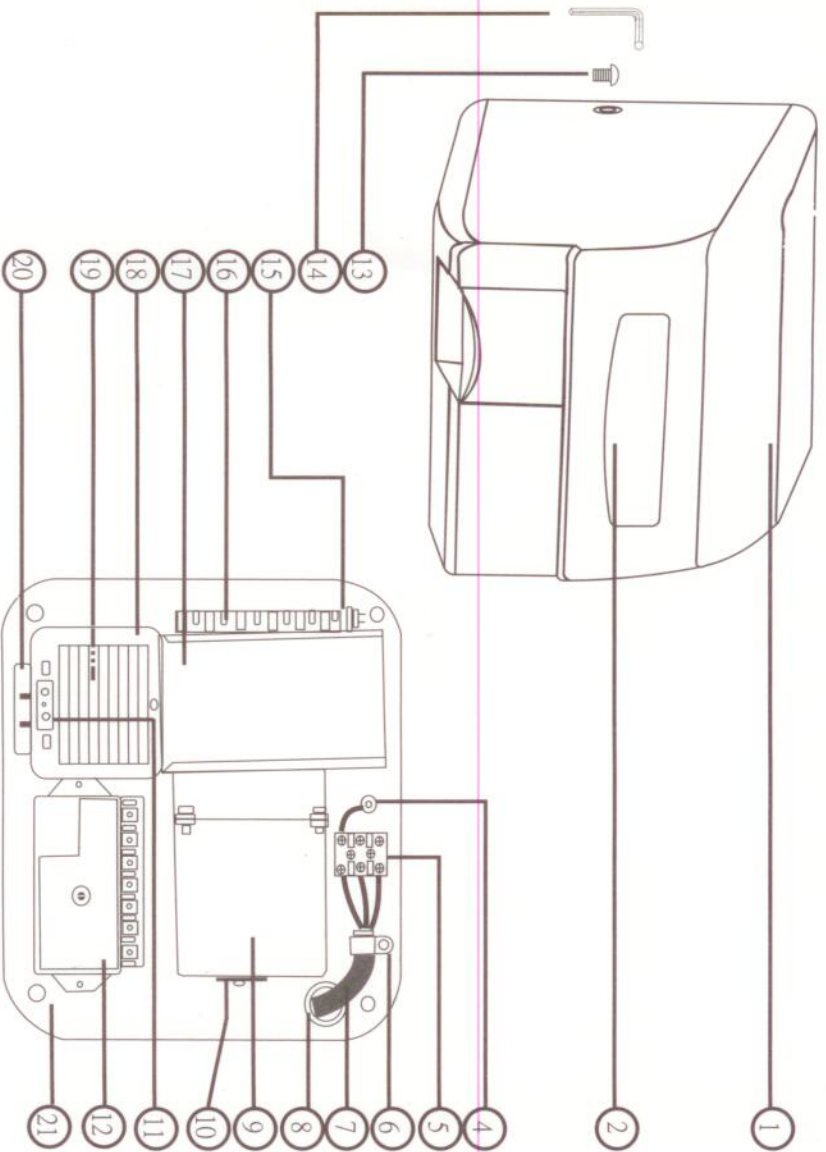

# PARTS LIST - AUTOMATIC

NO	DESCRIPTION	MATERIAL	QTY
1	ENCLOSURE	PAINTED ALUMINUM	1
2	PLATE	PLASTICS	1
3	-----	-----	-----
4	GROUND WASHER	COPPER	1
5	POWER TERMINAL BLOCK	PLASTICS	1
6	INSULATING BARRIER	PLASTICS	1
7	POWER CORD	-	-
8	BUSHING	PLASTICS	1
9	MOTOR	-	1 SET
10	MOTOR MOUNTING BRACKET	PLATED STEEL	1
11	SENSOR ASSEMBLY	-	1 SET
12	TIMER ASSEMBLY	-	1 SET
13	FIXING SCREW FOR CASING	STAINLESS STEEL	2
14	L KEY	PLATED STEEL	1
15	THERMOSTAT	-	1
16	HEATING ELEMENT ASSEMBLY	-	1 SET
17	FAN ENCLOSURE	PLATED STEEL	1
18	AIR OUTLET GUARD	PAINTED STEEL	1
19	FAN BLOWER	PLATED STEEL	1
20	MOTOR CAPACITOR	-	1
21	BASE ENCLOSURE	PLATED STEEL	1

# CONSTRUCTION DIAGRAM

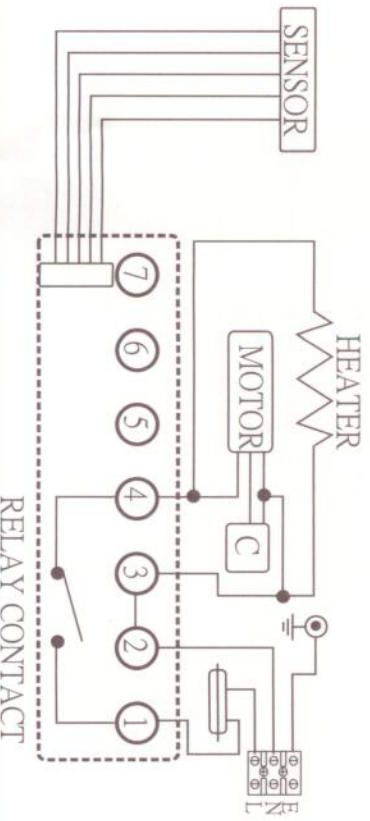

# ACCESSORIES

NAME	QTY
DOWEL	4
L KEY	1

# CONNECT DESCRIPTION

1. SECURE THE BASE PLATE ON THE WALL PROVIDED.
2. THE CONDUIT IN PLACE BY SUITABLE 1/2 INCH TRADE CONDUIT FITTING.
3. CONNECTIONS:
  - A. CONNECT THE LIVE WIRE COLORED RED (OR BROWN) TO THE TERMINAL BLOCK WHERE MARKED "L".
  - B. CONNECT THE NEUTRAL WIRE COLORED BLACK (OR BLUE) TO THE TERMINAL BLOCK WHERE MARKED "N".
  - C. CONNECT THE EARTH WIRE COLORED GREEN AND YELLOW (OR GREEN, NOTE BARE EARTH WIRES SHOULD BE SLEEVED WITH GREEN AND YELLOW OR GREEN SLEEVING) TO THE TERMINAL BLOCK WHERE MARKED WITH THE EARTH SYMBOL.



CONDUIT CONNECTION HOLE MATCH  
SUPPLE WIRE CONDUIT TO THIS HOLE



⊕ A

# MOUNTING INSTRUCTION

THIS PRODUCT IS INTENDED FOR INSTALLATION BY A QUALIFIED SERVICE PERSON USE AWG NO 14 SOLID CONDUCTOR FOR WIRING.

⊕ B

**1** FIX THE MOUNTING INSTRUCTION SHEET ON THE WALL. HOLE "C" "D" TO THE GROUND 130 CM IS SUITABLE.

**2** DRILL 4 HOLES. (A, B, C, D, 8 MM DIAMETER, 35 MM DEPTH)

**3** TAKE OFF MOUNTING INSTRUCTION SHEET. HAMMER DOWERS INTO 4 HOLES.

**6** INSTALL THE HOUSING BACK TO THE BASE PLATE AND SECURE THE HOUSING PROPERLY.

**5** CONNECT THE POWER CORD TO THE TERMINAL AND SCREW TIGHTLY. ATTENTION: WHEN INSTALLATION, DON'T HOLD THE ELECTRIC PARTS TO AVOID DAMAGE.

**4** REMOVE THE HOUSING FROM THE BASE PLATE. PUT THE POWER CORD AT LEAST 7 CM THROUGH THE HOLE OF THE BASE PLATE. SECURE THE BASE PLATE ON THE WALL.

⊕ D

130 CM TO THE GROUND IS SUITABLE.

⊕ C